
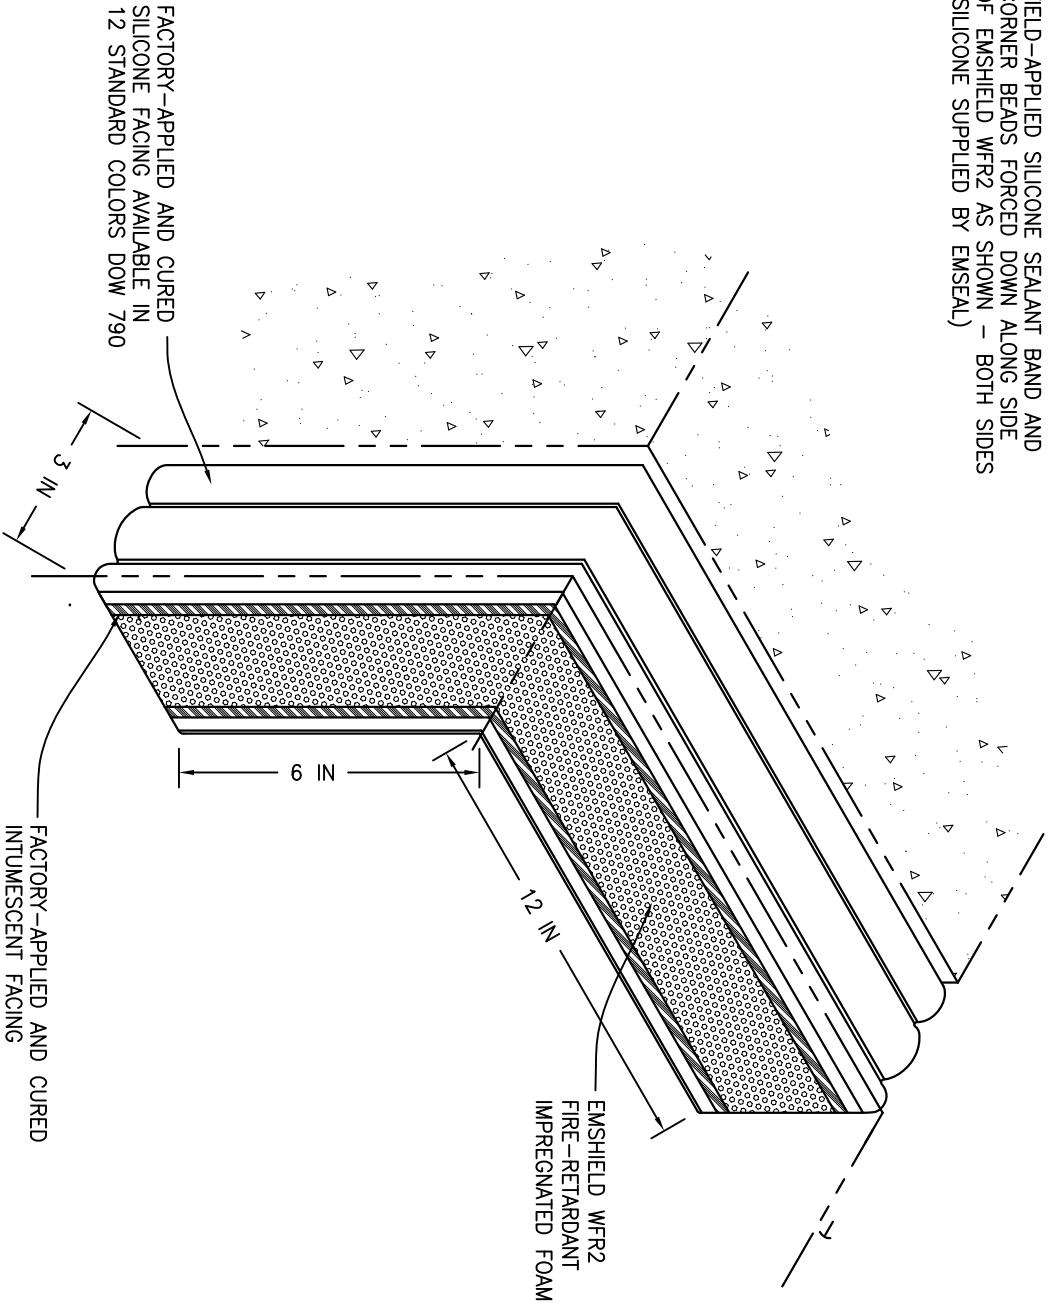


FIELD-APPLIED SILICONE SEALANT BAND AND CORNER BEADS FORCED DOWN ALONG SIDE OF EMSHIELD WFR2 AS SHOWN - BOTH SIDES (SILICONE SUPPLIED BY EMSSEAL)



JOINT GAPS FROM 1 TO 6 INCHES (25-150mm)
MOVEMENT: ±25% (TOTAL 50%) OF NOMINAL MATERIAL SIZE

EMSSEAL'S EMSHIELD WFR2 HAS BEEN TESTED IN ACCORDANCE WITH UL 2079 IN THE CONFIGURATION DEPICTED IN SYSTEM # WW-D-1079. USE OF THIS MATERIAL IN WALL ASSEMBLY CONFIGURATIONS OTHER THAN THAT DEPICTED IN UL SYSTEM # WW-D-1079 WILL NOT ENCUMBER OR LOWER THE RESISTANCE OF THE WALL BUT IS DONE SO AT THE DESIGNER'S DISCRETION AND RESPONSIBILITY FOR DESIGN OF A FIRE RATED WALL ASSEMBLY THAT MEETS APPLICABLE STANDARDS FOR THE PROJECT AND WHICH ADDITIONALLY IS CAPABLE OF RESISTING THE APPROXIMATELY 2.5 PSI (120 LBS PER FOOT OF JOINT BASED ON 4-INCH DEPTH OF SEAL) BACKPRESSURE OF THE WFR2 MATERIAL.

EMSSEAL JOINT SYSTEMS LTD.

EMSSEAL WFR2 OUTSIDE VERTICAL PLANE UNIVERSAL-90

A	07/13/09	TAB	GENERAL REVISIONS
<p>THIS DOCUMENT CONTAINS INFORMATION OF A CONFIDENTIAL NATURE UNAVAILABLE TO THE PUBLIC AND IS PROSECUTED BY EMSSEAL CORPORATION. ANY UNAUTHORIZED USE WILL BE PROSECUTED. THIS DRAWING IS PROTECTED BY COPYRIGHT. THE RIGHT TO REPRODUCE IN ANY FORM BEING THE EXCLUSIVE RIGHT OF EMSSEAL CORPORATION. NO PART OF THIS DRAWING IS TO BE REPRODUCED IN TWO OR THREE DIMENSIONS WILL BE PROSECUTED.</p>			
DRAWN BY:	DATE:	SCALE:	SHEET
TAB	05/18/09	N.T.S.	No. 1 OF 1
PART NUMBER:	FOAM EMSSEAL WFR2		
EMSSEAL WFR2 OUTSIDE VERTICAL U-90 - 001			